


SPECIFICATION DATA FOR TRANE

YSC / TSC / WSC 036A-H / 048A-H / 060A-H YHC / THC / WHC 036A-H / 048A-H / 060A-L,M,H UNITS

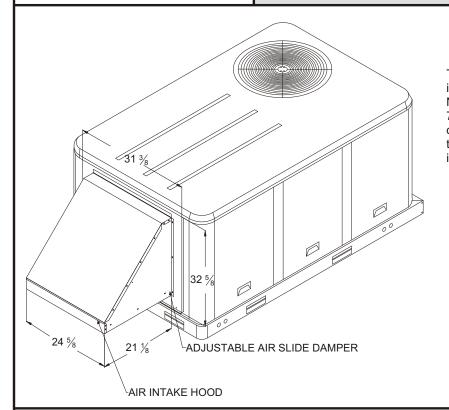

24 1/2

-MOTORIZED DAMPER ASSEMBLY

RSI MODEL#: 70-300-25 0-100% MANUAL FRESH AIR

The RSI 0-100% manual outside air system is designed to replace the unit duct cover. No drilling on the unit or field assembly of the 70-300-25 is required. The amount of outside air is controlled by simply adjusting the slide damper. The panel is fully insulated.

RSI MODEL#: 70-302-25 0-100% MOTORIZED FRESH AIR

The RSI 0-100% motorized outside air system is designed to replace the unit duct cover. No drilling on the unit is required. The 70-302-25 incorporates a 2-position control motor that opens the intake damper when the blower is energized. The amount of air is controlled by the adjustable slide damper. The intake panel is fully insulated. AIR INTAKE HOOD (SAME AS 70-300-25)

FOR LIST PRICES: FORM# TRLP25

FEBRUARY 13, 2003 FORM# TR100A25



AIR INTAKE PANEL

(REPLACES THE EXISTING PANEL)