


**DOWNFLOW APPLICATION  
SINGLE SPEED CENTRIFUGAL BLOWER EXHAUST**

**Notes:**

1. Shipped completely assembled and factory tested.
2. All wiring from control box to unit is field supplied.
3. Color co-ordinated with the unit.
4. Holes for power exhaust wiring in divider panel must be field drilled.
5. Supply air must be downflow.
6. Support legs provided.
7. Fresh air hood shipped with economizer.

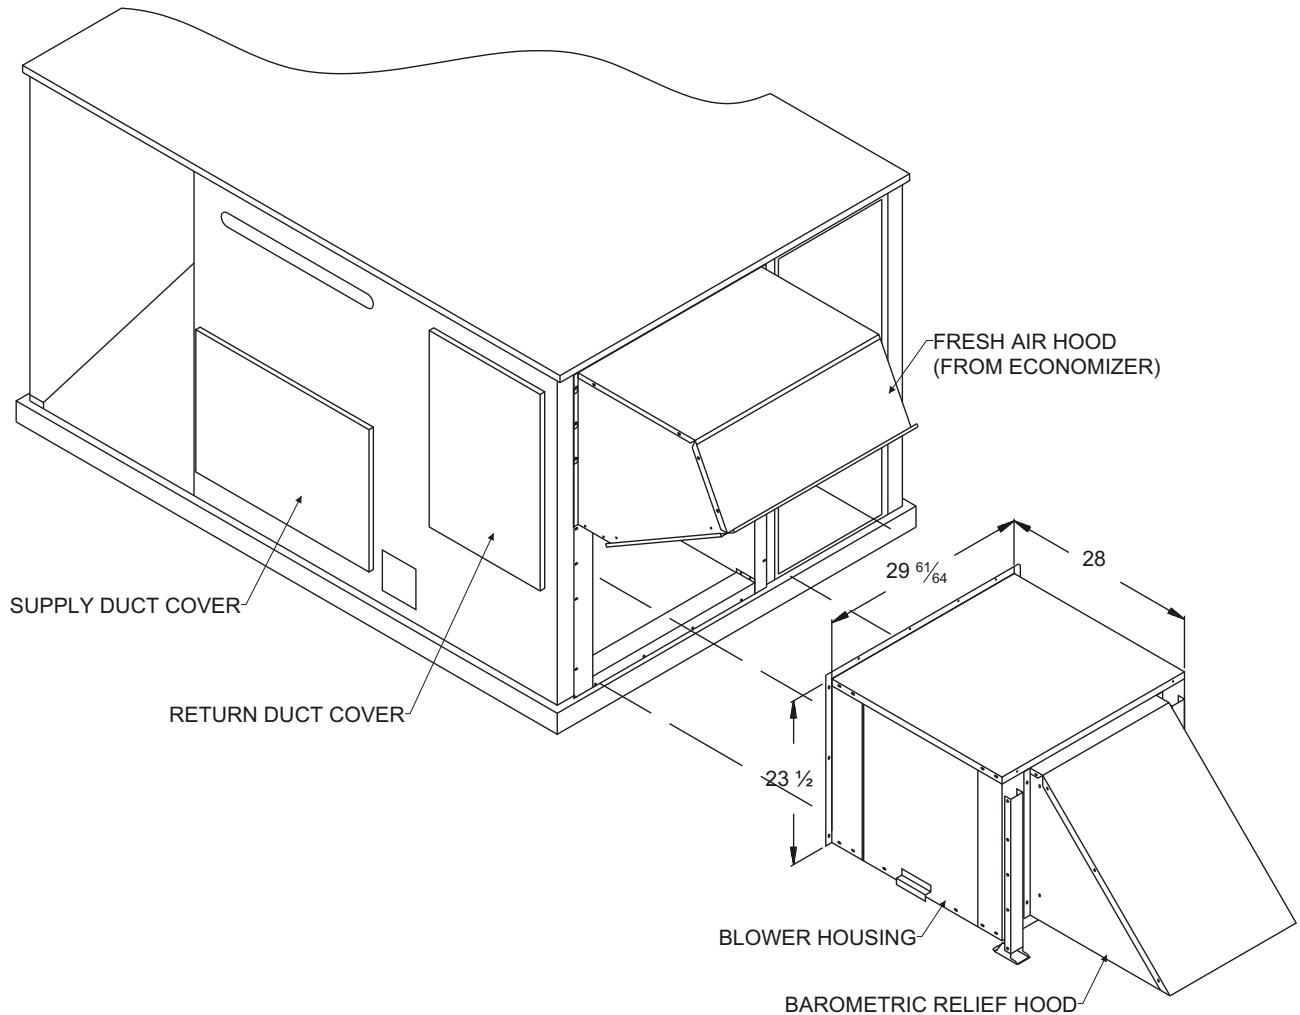

RRS MODEL#	YORK UNIT	VOLT	PHASE	MOTOR			UNIT						
				QTY	HP	RPM	CIR. QTY	FLA	MCA	FUSE SIZE	@ 0.1		BLOWER SIZE
82-455-44	037 049 061	-2 (208-230)+	3	1	1	1725	1	3.8	4.75	7	2850	780	10 x 10
		-3 (460)+						1.9	2.4	5			
		-4 (575)						1.4	1.8	3			

Note: + Indicates motors are multi-voltage, factory will wire per model# ordered.  
Example: 82-455-44-\*# = 82-455-44-23 (For 078 unit 230 volt 3 phase motor).

FOR LIST PRICES: FORM# YKLP44

JULY 14, 2010 FORM# YKEBS44-1