



**RHEEM MODEL#: RXRF-FCA1
RSI MODEL#: 60-285-08
0-35% MANUAL FRESH AIR**

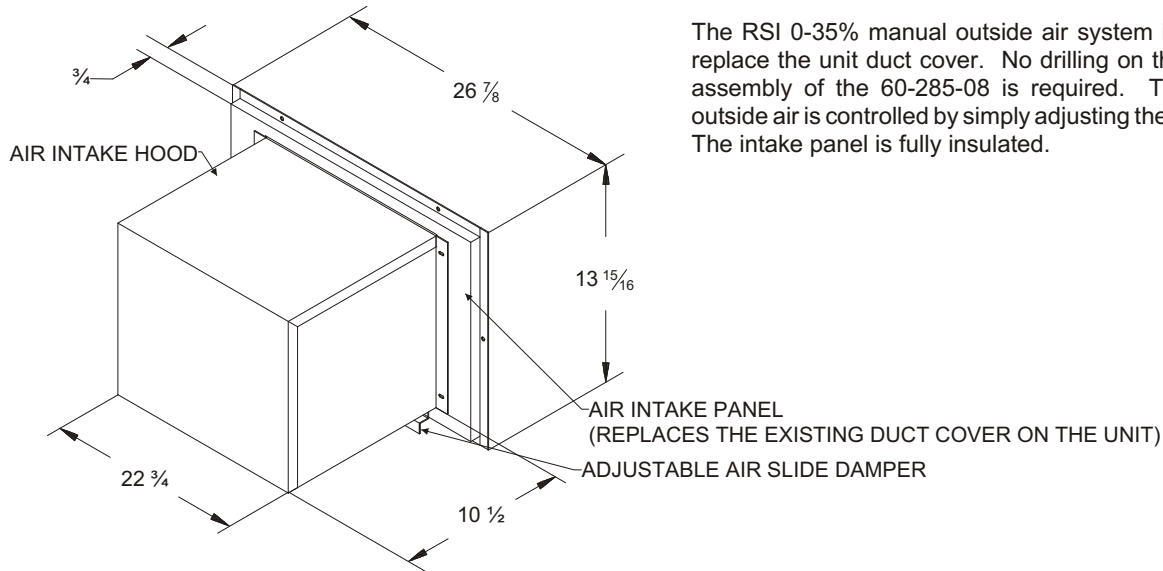

The RSI 0-35% manual outside air system is designed to replace the unit duct cover. No drilling on the unit or field assembly of the 60-285-08 is required. The amount of outside air is controlled by simply adjusting the slide damper. The intake panel is fully insulated.

**RHEEM MODEL#: RXRF-FCB1
RSI MODEL#: 60-287-08
0-35% MOTORIZED FRESH AIR**

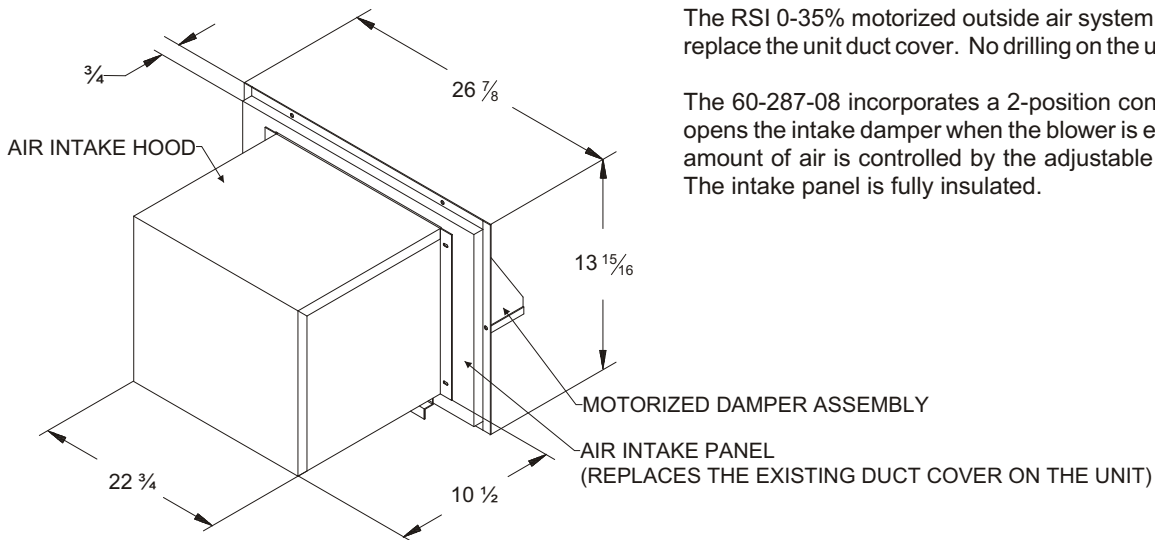

The RSI 0-35% motorized outside air system is designed to replace the unit duct cover. No drilling on the unit is required.

The 60-287-08 incorporates a 2-position control motor that opens the intake damper when the blower is energized. The amount of air is controlled by the adjustable slide damper. The intake panel is fully insulated.