


**HORIZONTAL APPLICATION
SINGLE SPEED CENTRIFUGAL BLOWER EXHAUST**

Notes:

1. Shipped completely assembled and factory tested.
2. All wiring from control box to unit is field supplied.
3. Color co-ordinated with the unit.
4. Holes for power exhaust wiring in divider panel must be field drilled.
5. Support legs provided.
6. Fresh air hood shipped with economizer.
7. Return duct work may require additional support.

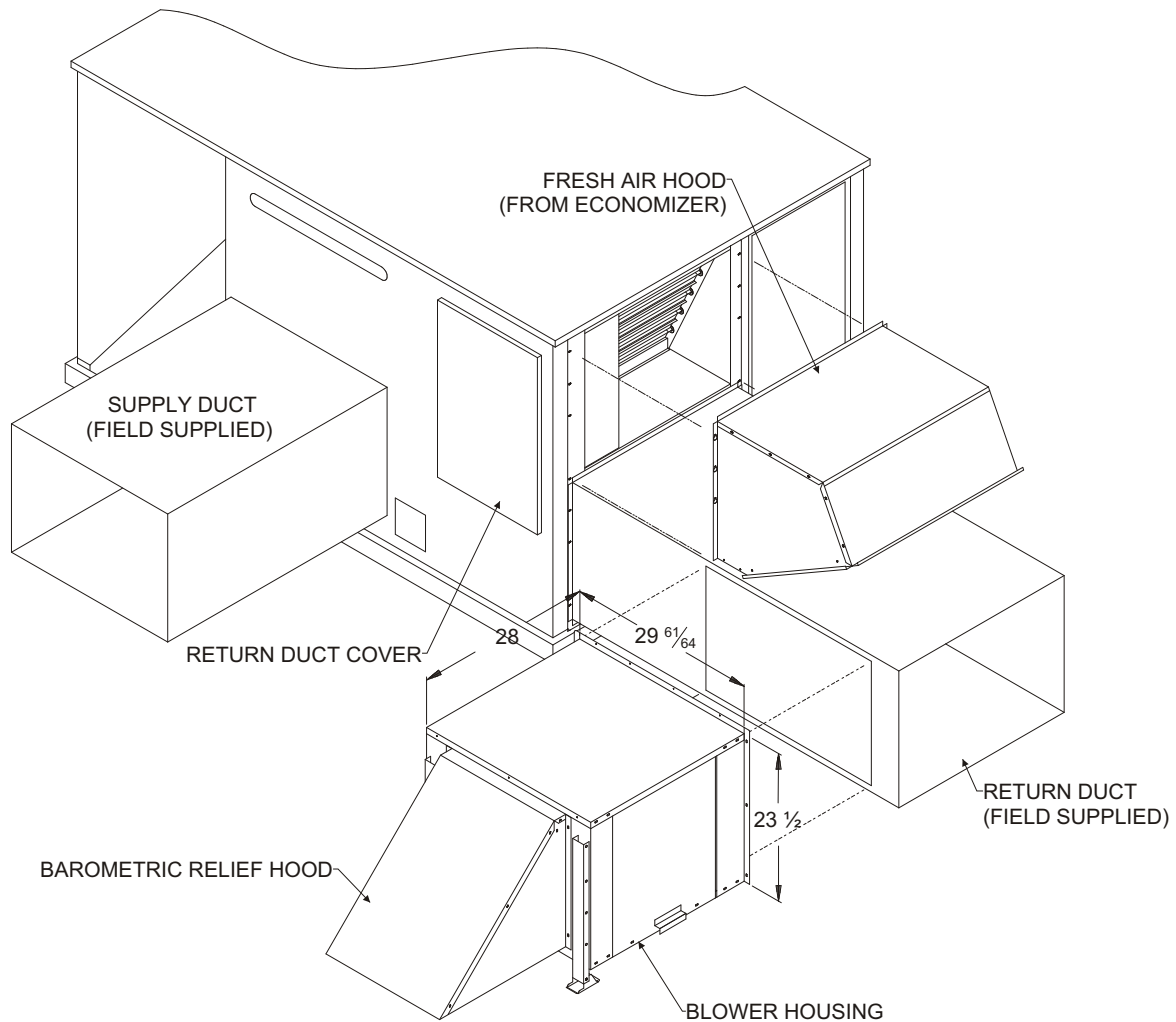

RRS MODEL#	YORK UNIT	VOLT	PHASE	MOTOR			UNIT						
				QTY	HP	RPM	CIR. QTY	FLA	MCA	FUSE SIZE	@ 0.1		BLOWER SIZE
											CFM	RPM	
82-455-44	037	-2 (208-230)+	3	1	1	1725	1	3.8	4.75	7	2850	780	10 x 10
	049	-3 (460)+						1.9	2.4	5			
	061	-4 (575)						1.4	1.8	3			

Note: + Indicates motors are multi-voltage, factory will wire per model# ordered.
Example: 82-455-44-*# = 82-455-44-23 (For 078 unit 230 volt 3 phase motor).