


HORIZONTAL APPLICATION SINGLE SPEED CENTRIFUGAL BLOWER EXHAUST

Notes:

1. Shipped completely assembled and factory tested.
2. All wiring from control box to unit is field supplied.
3. Color co-ordinated with the unit.
4. Holes for power exhaust wiring in divider panel must be field drilled.
5. Support legs provided.
6. Fresh air hood shipped with economizer.
7. Return duct work may require additional support.

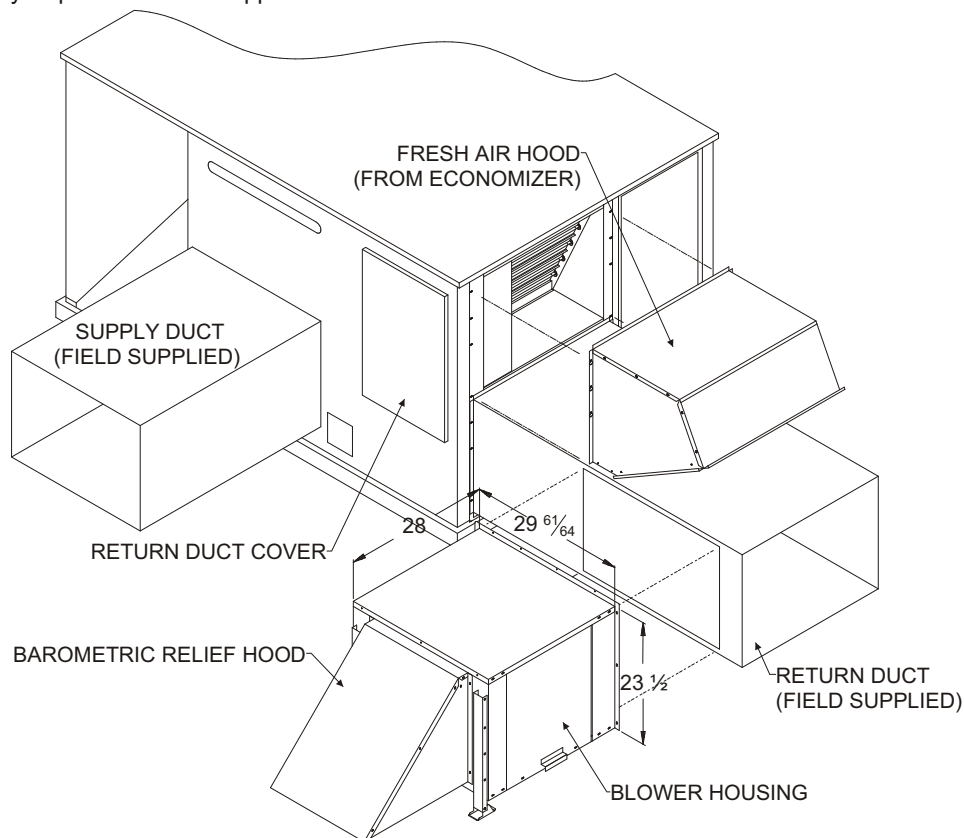

RRS MODEL#	YORK UNIT	VOLT	PHASE	MOTOR			CIR. QTY	FLA	MCA	UNIT FUSE SIZE	@ 0.1		BLOWER SIZE
				QTY	HP	RPM					CFM	RPM	
82-455-29A	078	-2 (208-230)+	3	1	1	1725	1	3.8	4.75	7	3000	528	12 x 12
		-3 (460)+						1.9	2.4	5			
		-4 (575)						1.4	1.8	3			
82-455-29B	090	-2 (208-230)+	3	1	1	1725	1	3.8	4.75	7	3400	595	12 x 12
		-3 (460)+						1.9	2.4	5			
		-4 (575)						1.4	1.8	3			
82-455-29C	120	-2 (208-230)+	3	1	1 1/2	1725	1	5.6	7.0	10	3800	665	12 x 12
		-3 (460)+						2.8	3.5	5			
		-4 (575)						2.0	2.5	4			
82-455-29D	150	-2 (208-230)+	3	1	2	1725	1	7.0	8.8	12	4650	805	12 x 12
		-3 (460)+						3.5	4.4	7			
		-4 (575)						2.4	3.0	5			

Note: + Indicates motors are multi-voltage, factory will wire per model# ordered.
Example: 82-455-29A-*# = 82-455-29A-23 (For 078 unit 230 volt 3 phase motor).

FOR LIST PRICES: FORM# YKLP29

JULY 14, 2010 FORM# YKEBS29-2

SUPERSEDES 04-12-10