


DOWNFLOW APPLICATION SINGLE SPEED CENTRIFUGAL BLOWER EXHAUST

Notes:

1. Shipped completely assembled and factory tested.
2. All wiring from control box to unit is field supplied.
3. Color co-ordinated with the unit.
4. Supply air must be downflow.
5. Support legs provided.
6. Fresh air hood shipped with economizer.

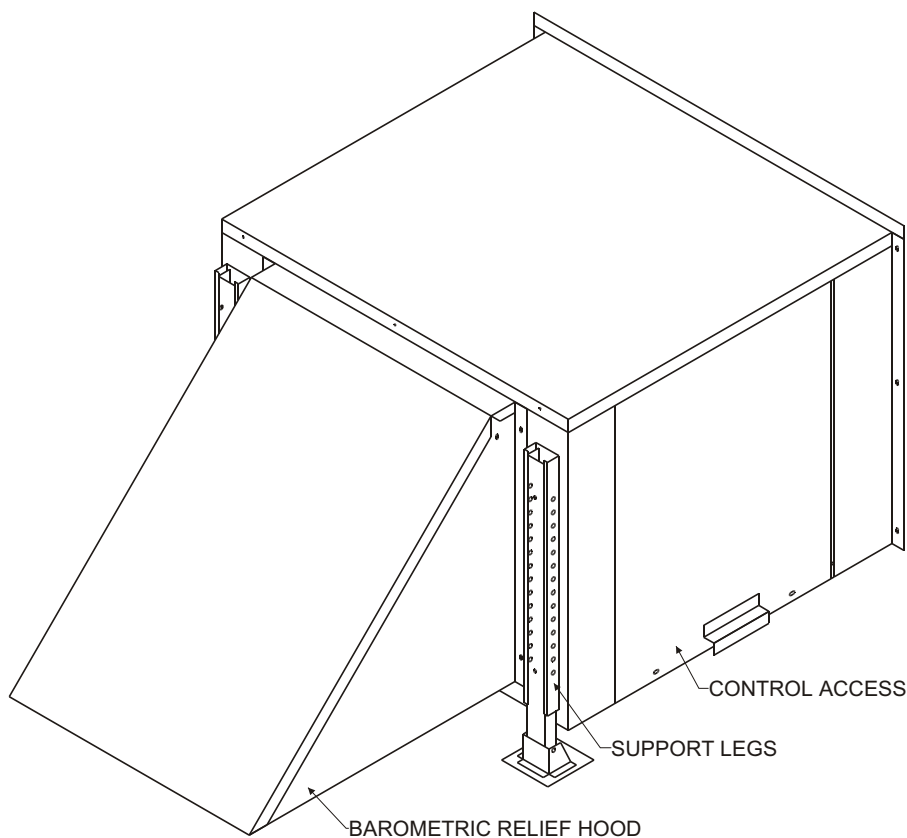

RRS MODEL#	LENNOX UNIT	VOLT	PHASE	MOTOR			CIR. QTY	FLA	MCA	UNIT FUSE SIZE	@ 0.1		BLOWER SIZE
				QTY	HP	RPM					CFM	RPM	
50-455-47A	090	-2 (208-230)+	3	1	1	1725	1	3.8	4.75	7	3400	595	12 x 12
		-3 (460)+						1.9	2.4	5			
		-4 (575)						1.4	1.8	3			
50-455-47B	120	-2 (208-230)+	3	1	1 ½	1725	1	5.6	7.0	10	3800	665	12 x 12
		-3 (460)+						2.8	3.5	5			
		-4 (575)						2.0	2.5	4			
50-455-47C	150	-2 (208-230)+	3	1	2	1725	1	7.0	8.8	12	4650	805	12 x 12
		-3 (460)+						3.5	4.4	7			
		-4 (575)						2.4	3.0	5			

Note: + Indicates motors are multi-voltage, factory will wire per model# ordered.
Example: 50-455-47A-*# = 50-455-47A-23 (For 090 unit 230 volt 3 phase motor).

FOR LIST PRICES: FORM#

NOVEMBER 20, 2009 FORM# LXEB547-1